


## DATA SHEET ▶ OTDR DX990P BASIC MM

M/DX990PBMM

<b>MODEL</b>	DX990P BASIC MM		
<b>WAVELENGTH</b>	850/1300nm		
<b>DYNAMIK RANGE</b>	28/26dB		
<b>EVENT BLIND ZONE</b>	1m		
<b>ATT BLIND ZONE</b>	5m		
<b>TEST RANGE</b>	100m / 500m / 1.25km / 2.5km / 5km / 10km / 20km / 40km / 80km / 125km / 260 km / 420 km		
<b>PULSE WIDTH</b>	3ns / 5ns / 10ns / 20ns / 30ns / 50ns / 80ns / 100ns / 200ns / 300ns / 500ns / 800ns / 1us / 2us / 3us / 5us / 8us / 10us/20us		
<b>RANGING ACCURACY</b>	± ( 0-7m + Sample Interval + 0.005% X Test Distance)		
<b>SAMPLE RESOLUTIONS</b>	0.05m~4m	<b>LOSS ACCURACY</b>	± 0.001dB
<b>MAX SAMPLE POINTS</b>	≥ 256K	<b>REFLECTION ACCURACY</b>	0.03dB/dB
<b>STORAGE</b>	INTERNAL 8.2G	<b>FILE FORMAT</b>	SOR standard
<b>POWER SUPPLY</b>	AC/DC Input: 100V-240V 50/60 HZ 0.5A Output: 19V 1.5A	<b>BATTERY</b>	LITHIUM 7.4V 5200mAh
<b>DISPLAY</b>	7inch LCD TOUCH SCREEN	<b>CONNECTOR</b>	FC/SC
<b>SIZE</b>	216*157*74mm	<b>WEIGHT</b>	≤ 1kg
<b>TEMPERATURE</b>	-10°C + 50°C STORAGE -40°C+70°C	<b>HUMIDITY</b>	0.95% non condensing

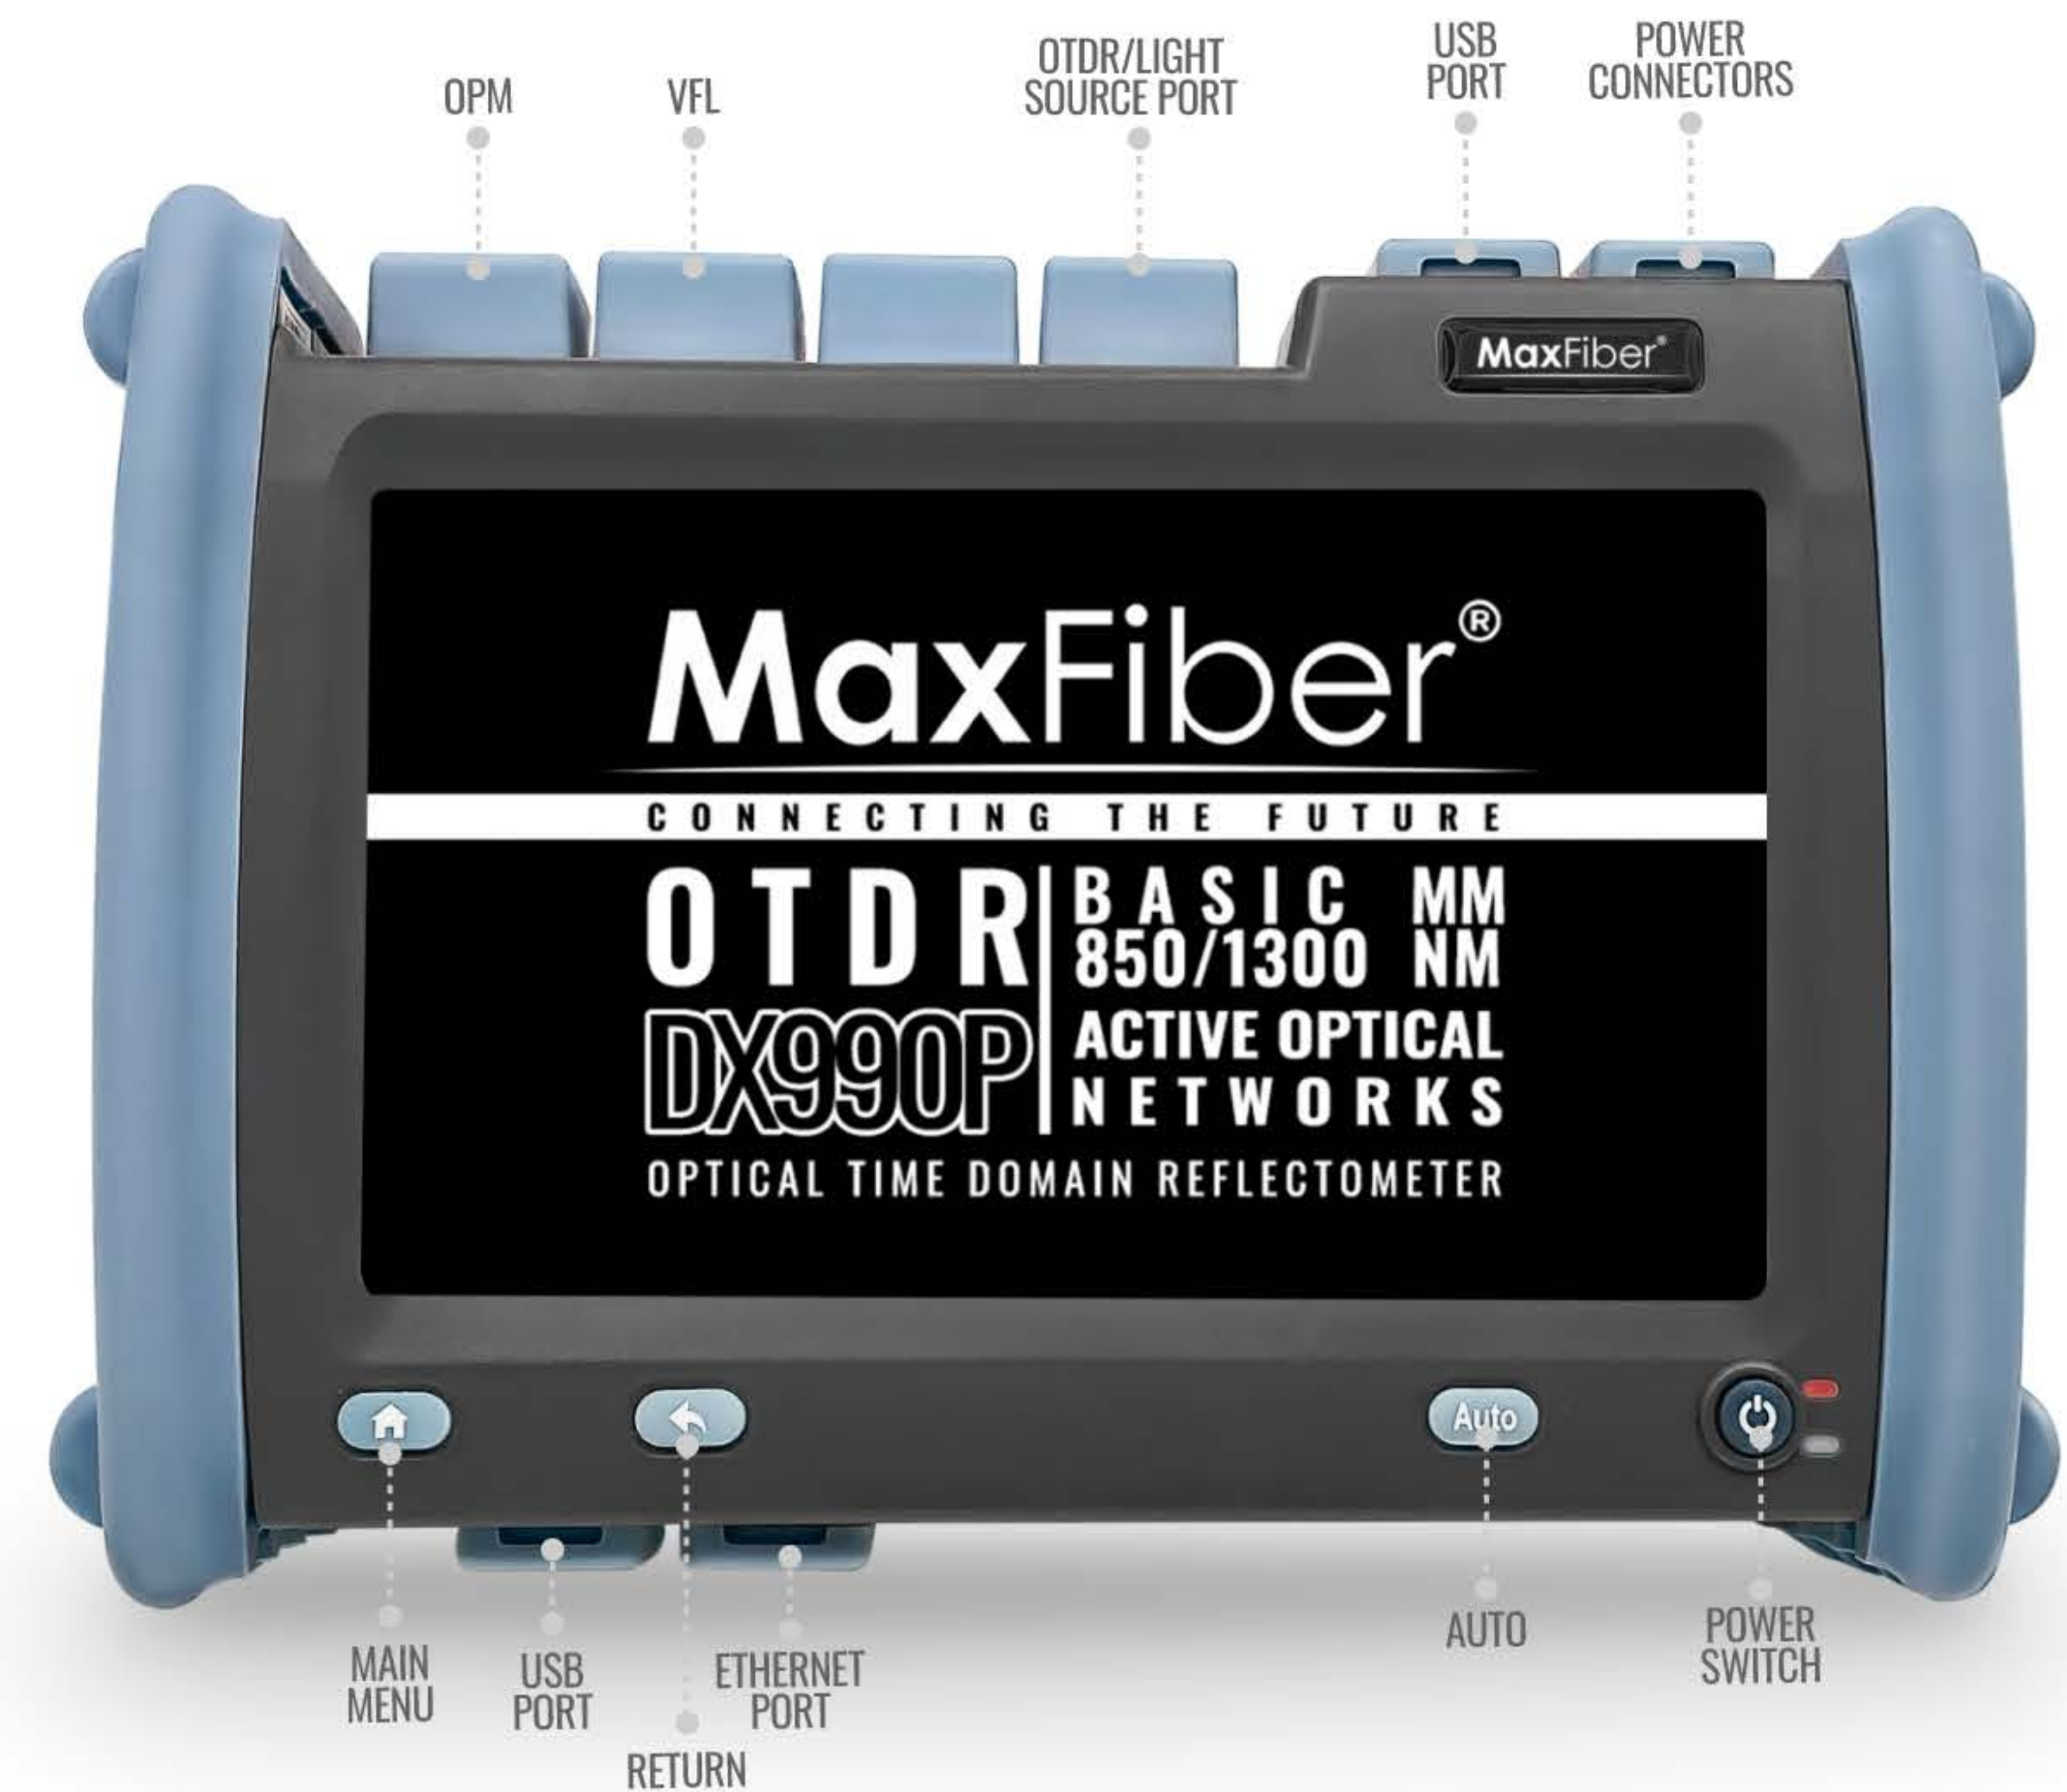

OPM	
<b>WAVELENGTH</b>	800nm~1700nm
<b>TEST SCOPE</b>	-50dBm~+26dBm/-70dBm~+6dBm
<b>C. WAVELENGTH</b>	1310nm / 1550 nm
<b>CONNECTOR</b>	FC/SC-ST

LS	
CONSISTENT WITH OTDR OUTPUT WAVELENTGH	
<b>LASER TYPE</b>	FP-LD
<b>OUTPUT POWER</b>	*5dBm
<b>STABILITY</b>	CW 0.5dB/15min
<b>CONNECTOR</b>	FC/SC-ST

VFL	
<b>WAVELENGTH</b>	650nm ± 20nm
<b>OUTPUT POWER</b>	≥ 10mW
<b>MODE</b>	CW/1Hz/2Hz
<b>CONNECTOR</b>	2.5MM FERRULE



PDF CREA Y GUARDA ARCHIVOS EN PDF

VISUALIZAR LOS ARCHIVOS .SOR

