DATA SHEET ▸ DYNAMIK BLACK M6 FUSION SPLICER

M/FSDBM6

LA FUSIONADORA DYNAMIK BLACK M6 DE ALTO RENDIMIENTO ES APTA PARA TRABAJAR TODAS LAS FIBRAS DESPLEGADAS EN REDES FTTX, REDES LOCALES, ETC. UN EQUIPO DE ALINEACIÓN POR NÚCLEO, 6 MOTORES, PORTABILIDAD, PRECISIÓN Y ROBUSTEZ.

IDENTIFY FIBER	SM(G.652), MM(ITU-T G.651), DS(G.653), NZDS(G.655), SM(G.654.E)
CLADDING DIAMETER	80-150MM
COATING DIAMETER	160-1000MM
TYPICAL LOSS	SM: 0.02DB ; MM:0.01DB : DS: 0.04DB ; NZDS: 0.04DB
CUTTING LENGTH	5-16MM (COATING D 250MM),16MM (COATING:250-1000MM)
PROGRAM	PROGRAM 40 GROUPS
OPERATION MODE	AUTOMATIC & MANUAL MODE
AUTO HEAT	16 SECONDS FOR 60MM AND 40MM SLEEVES
SPLICE TIME	6 SECONDS
OBSERVATION MODE	VIEWING DISPLAY DUAL HIGH SENSITIVY CAMERA, 5 INCH LCD
FUSION RECORDS	4000 GROUPS DATA RECORDS SPLICING
ESTIMATE LOSS	SM: 0.02dB ; MM:0.01dB : DS: 0.04dB ; NZDS: 0.04dB
TENSION	1.8 ~ 2.25N
OPERATION INTERFACE	GUI MENÚ INTERFACE
BATTERY INTERFACE	6800 MAH LI-BATTERY HIGH PERFORMANCE, 240/480 CYCLES
POWER SUPPLY	INPUT: AC100-240V(50-60HZ) OUTPUT
ELECTRODES LIFE	4000 ARC DISCHARGES
INTERFACE	USB 2.0 PORT FOR SOFTWARE UPGRADING & RECORDS EXPORTING
OPERATION ENVIROMENT	ALTITUDE: 0-5000M, HUMIDITY:0.95% TEMP:-10~+50°C 15M/S
VOLUME/WEIGHT	140X150X160MM 3.5KG (BATTERY INCLUDED)
APLICABLE FIBER	SM(G.652), MM(G.651), DS(G.653), NZDS(G.655) & SM (G.657)
FIBER ZOOM	6 MOTOR IS 400X FOR X OR Y VIEW, 200X FOR X AND Y VIEW

PREMIUM

MATERIAL
METAL

3 AÑOS DE GARANTÍA LIMITADA

3 SERVICIOS DE MANTENIMIENTO GRATIS

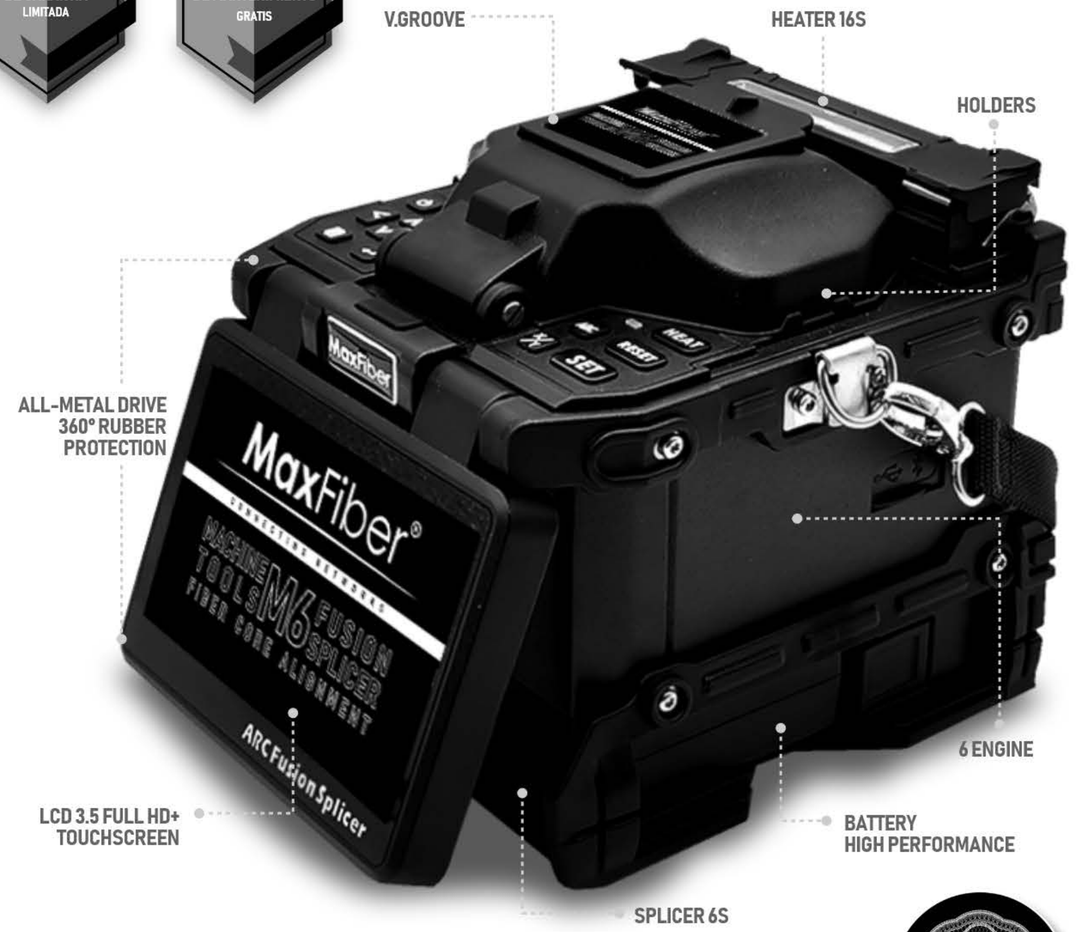

SUPER CHARGE
TECHNOLOGY

6 SECONDS SPLICING | 6 ENGINE | 16 SECONDS HEATING | AUTOMATIC FAST HEATING | IDENTIFY FIBER (SM / MM)